CAR-MON AIR FLOW TEES

Tee fittings feature air flow design with 90° lateral take-off expanded at a 30° angle in direction of air flow for minimum turbulence. Branch is continuous welded to main section. Tees are minimum 24 gauge galvanized steel, lockseam construction with bead and crimp. A" dimension is 24" standard.
Specify flange inside diameter to match flexible tubing or collar diameter to match branch duct.
NOTE: To use Car-Mon tees with spiral pipe, indicate by marking the box below.

CAR-MON **SERIES TF** STRAIGHT AIR FLOW TEE

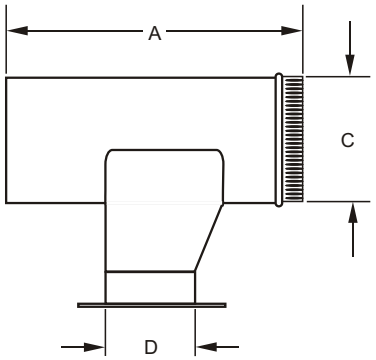

QTY.	FLANGE	COLLAR	A	C	D

NOTE: "D" DIMENSION CANNOT EXCEED "C" DIMENSION

☐ Check this box if tees are to be used with spiral pipe


Tee with flange

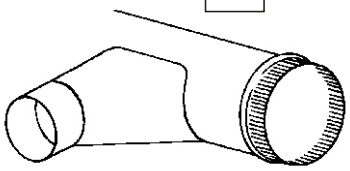
Tee with collar


Spiral pipe configuration

CAR-MON **SERIES TTF** TAPERED AIR FLOW TEE

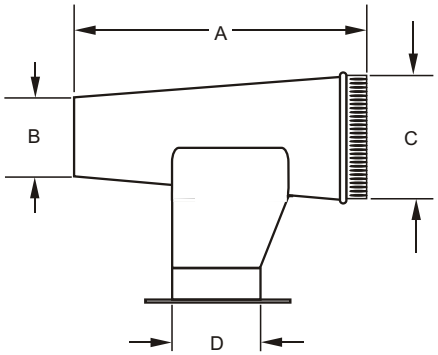

QTY.	FLANGE	COLLAR	A	B	C	D

NOTE: "D" DIMENSION CANNOT EXCEED "B" DIMENSION

☐ Check this box if tees are to be used with spiral pipe


Tee with flange


Tee with collar


Spiral pipe configuration

CAR-MON PRODUCTS, INC.
1225 Davis Road, Elgin, IL 60123 847/695-9000
www.car-mon.com e-mail: info@car-mon.com