





SERIES WX TUBULAR EXHAUST ARMS 12' TO 18'

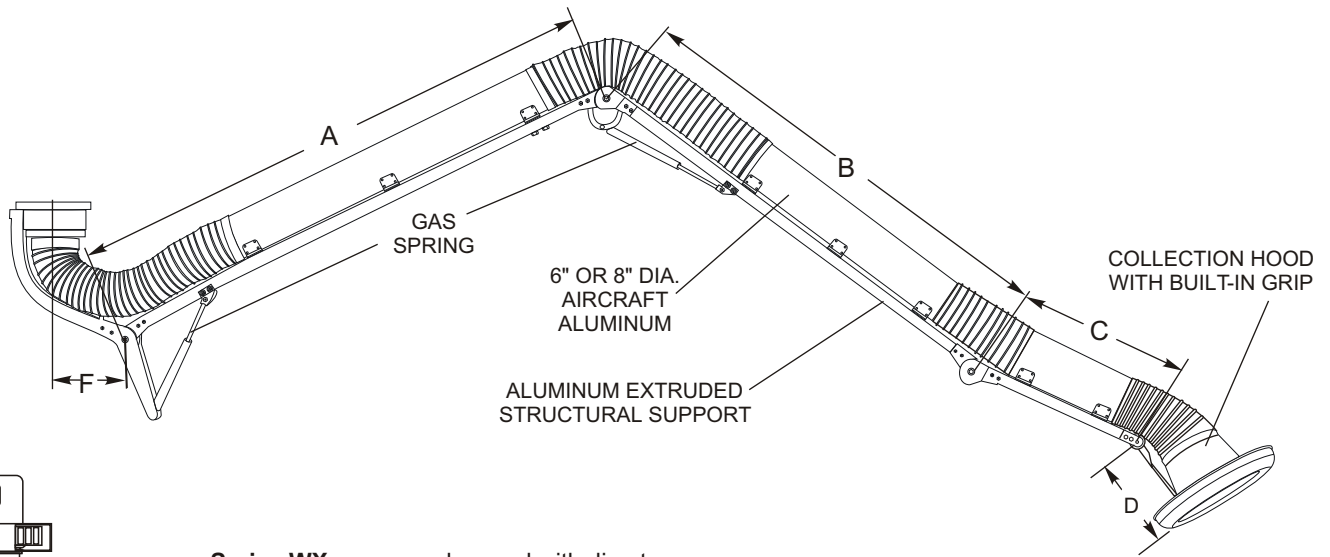

Series WX arms can be used with direct connected Series CMW fan. See submittal sheet 04-F4 for fan specifications.

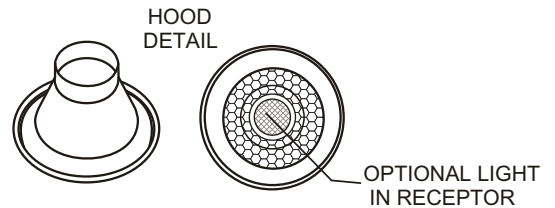


Wall Platform



WX-WB
Wall mounted,
with or without
CMW fan

Ceiling Platform



PCF
Ceiling mounted,
with or without
CMW fan

OPTIONAL LIGHT KITS

Series LK is light kit with halogen light, receptor switch, and transformer.

Series LKF has LK components plus fan switch and motor starter for up to 1½ HP, 1 or 3 phase.

QUANTITY		MODEL	PLATFORM		DIMENSIONS					OPTIONS			VOLTAGE		
6"Ø	8"Ø		WALL	CEILING	A	B	C	D	F	CMW FAN	LK	LKF	VOLT	PH	HZ
		WX-120			58"	39"	29"	15"	10"						
		WX-150			74"	59"	29"	15"	10"						
		WX-180			92"	73"	33"	15"	10"						

Series WX fume extraction positioning arm is constructed of tubular sections joined by unobstructed flex hose connections. The arm rotates on a bearing assembly comprised of a non-metallic, lubricistic synthetic material. The arm assembly shall be electrically non-conductive to eliminate any chance of conveying current to the duct system and to avoid accidental arcing. Arms are designed for ceiling or wall mounting to provide source capture for fume removal applications. Available in standard diameters of 6" and 8" The WX-120 capable of 12' extension, the WX-150 capable of 15' extension, and the WX-180 is capable of 18' horizontal extension. All arms feature 180° rotation when wall mounted, 360° rotation when ceiling mounted. WX Series arms can be utilized individually with a direct connected CMW fan or with duct work for multiple stations. An optional light kit for operating the receptor light or the receptor light and the fan is available.

Custom lengths and configurations available. Consult factory for details.