




SERIES TS TUBING SLING

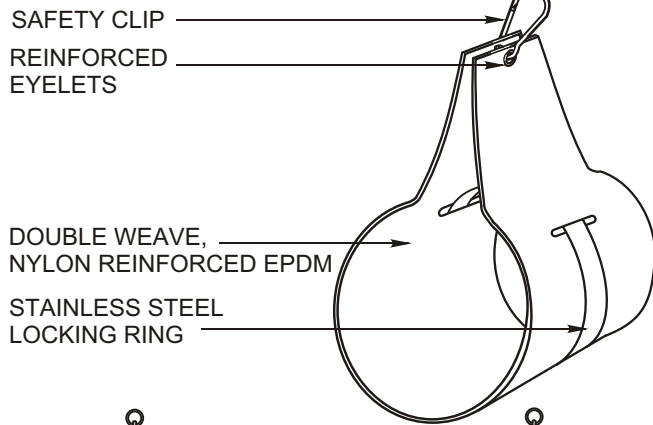

WITH HTX-S, CLXII, & NE TUBING



WITH NU-FLEX TUBING, NE SLEEVE IS USED


The Car-Mon **Series TS** Tubing Sling offers a safe and convenient way to raise and lower overhead assemblies. Used with the Car-Mon LFT 25/25, BA Balancer or PS and PSW pull-up sets, it can be placed anywhere along the length of hose to facilitate both operational placement and storage.

The tubing sling is constructed of a double weave, nylon reinforced EPDM material and has reinforced eyelets, a stainless steel locking band, safety clip and harness ring. The Series TS is available in sizes to fit hose from 3" to 8" in diameter. For larger sizes or for metal tubing, consult the factory.

Note: To avoid damage, never wrap cable or rope directly around non-metallic tubing.

QTY.	TUBE TYPE	TUBE DIAMETER	TUBE LENGTH	ADAPTER TYPE

SERIES PP ADAPTER POSITIONING POLE



QTY.

Series PP Adapter Positioning Pole does not require additional fittings on the adapter for its use. It can be used to place almost any exhaust adapter from the ground. The pole is adjustable to 104" and is 57" in the closed position.